


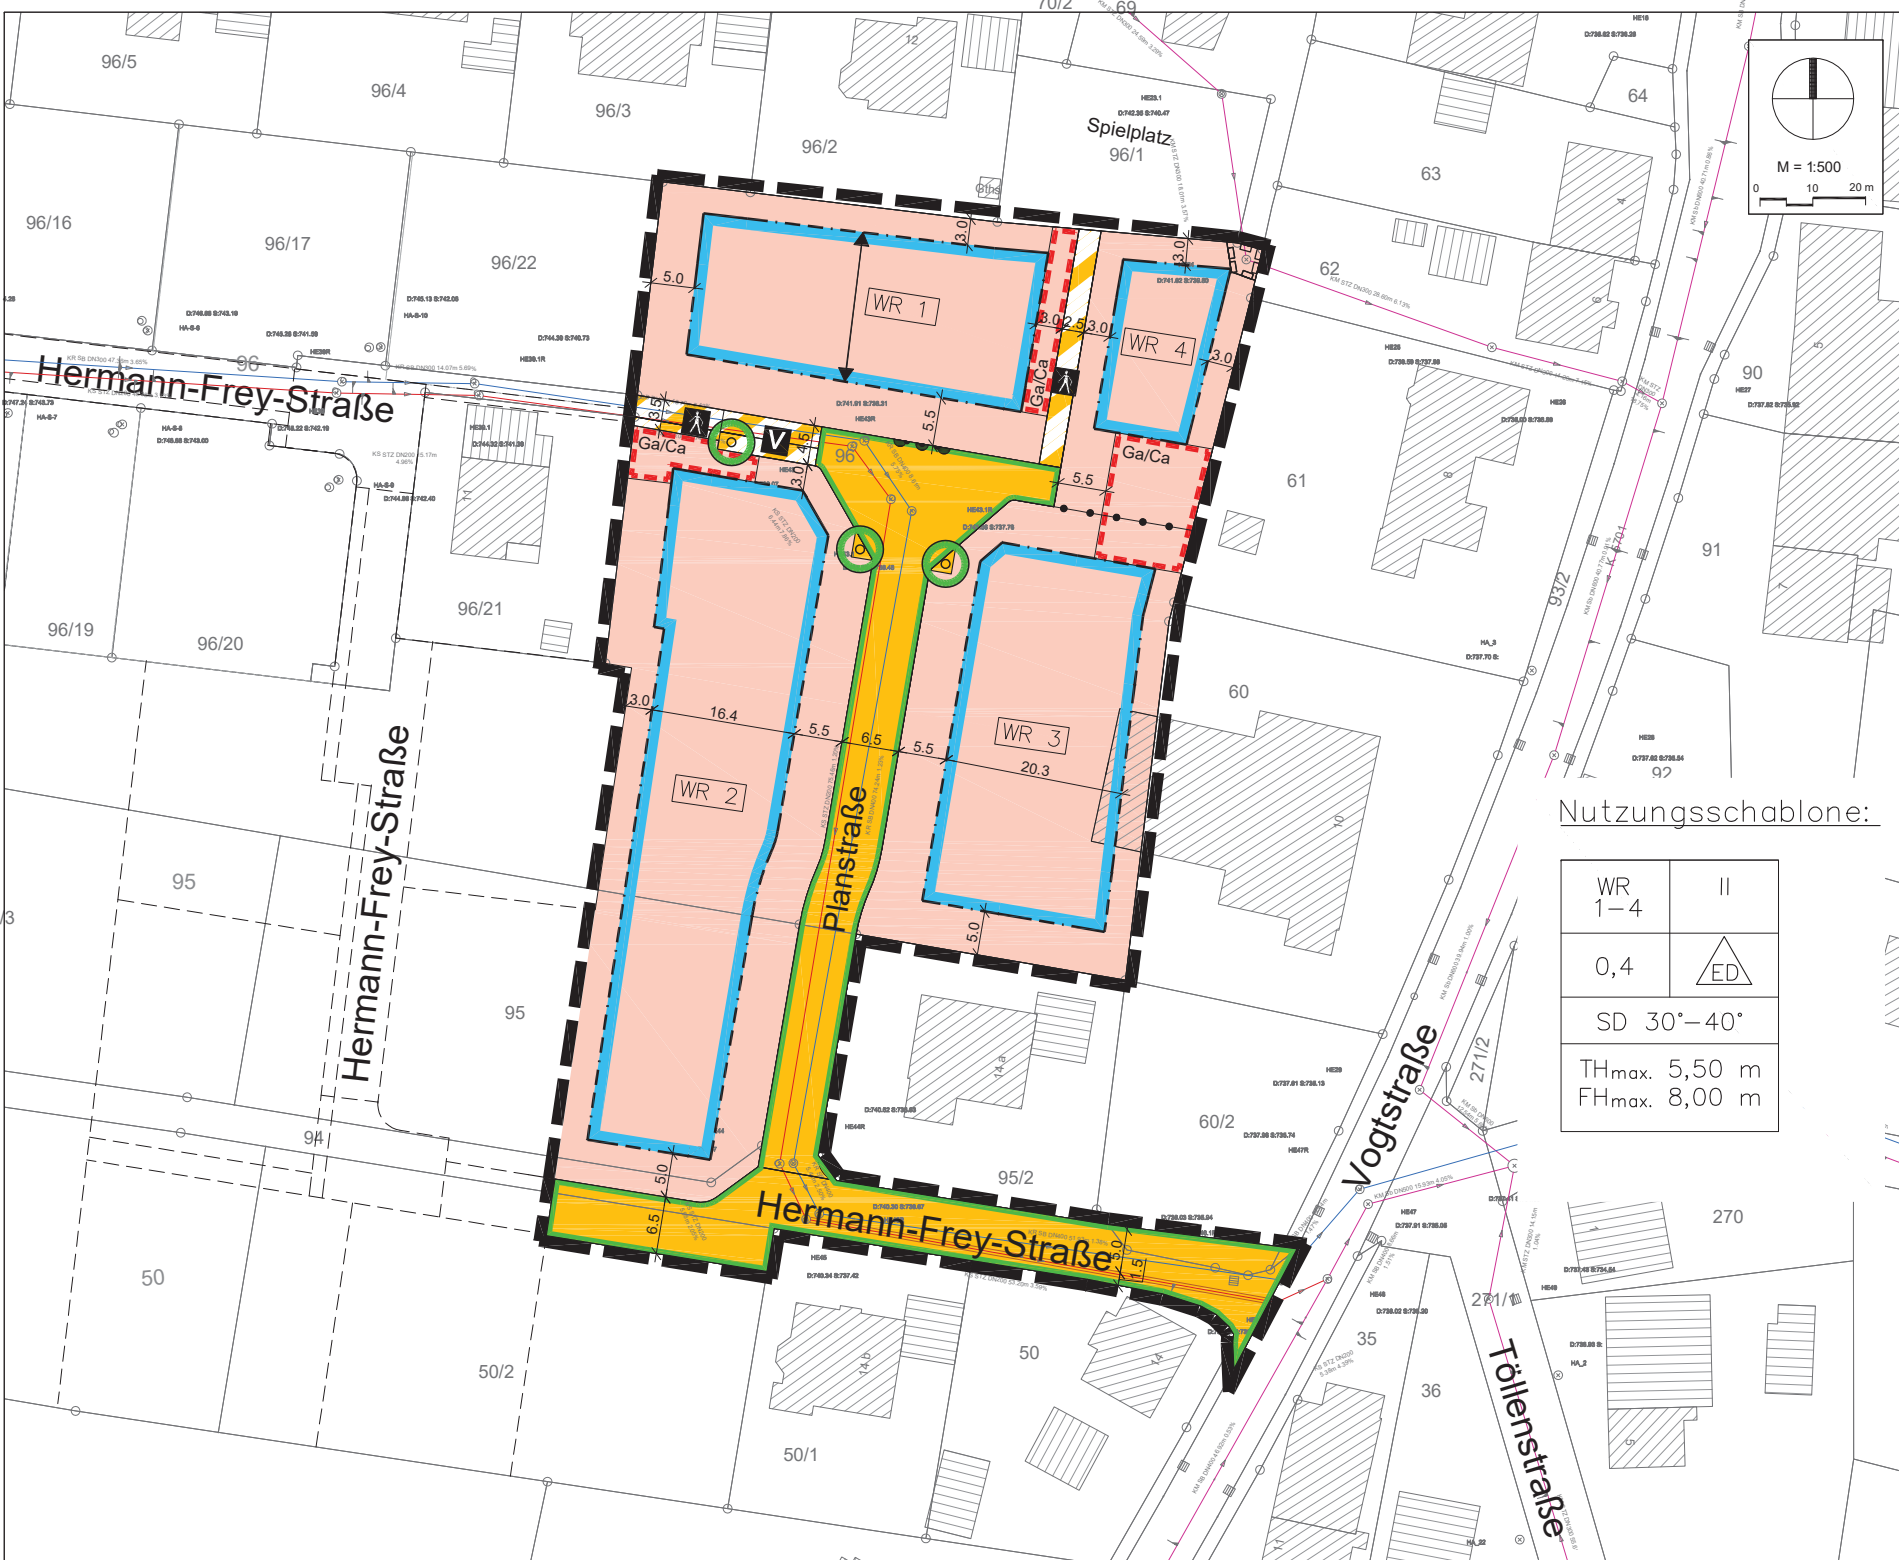

Nutzungsschablone:

WR 1-4	II
0,4	ED
SD 30°-40°	
THmax. 5,50 m	
FHmax. 8,00 m	